




Klaran® WR Series UVC LED Reactor

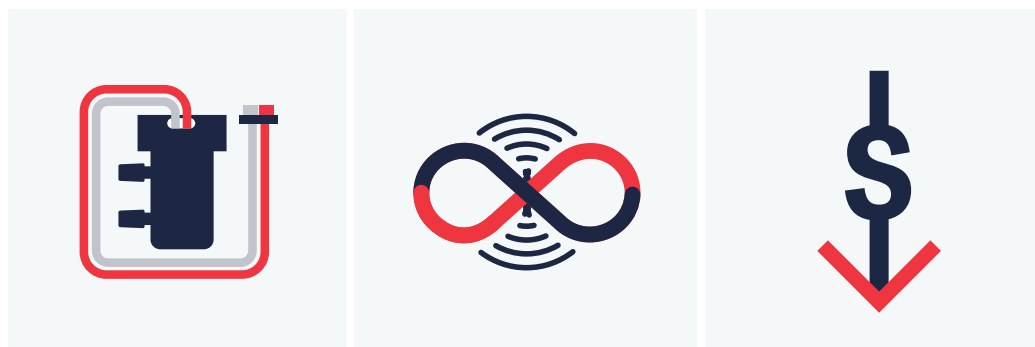

PLUG & PLAY

Klaran WR can be easily integrated into existing point-of-use dispensing systems or offered as a value added standalone option.

MAINTENANCE-FREE DISINFECTION

Proven on-demand water treatment for the full lifetime of typical point-of-use water systems without UV light source maintenance.

LOW COST OF OWNERSHIP

On-demand performance with proven UVC technology for under a penny per liter.



Product Characteristics at 2 Liters Per Minute

Characteristic	Unit	Min	Typ.
End of Life Disinfection Log Reduction Value (E. Coli)	LRV	>3	>3
Beginning of Life Disinfection Log Reduction Value (E. Coli)	LRV	>3	>4
Treatment Capacity (End of Life)	Liters	36,000	

NOTES:

Performance characteristics and treatment capacity can be varied at different flow rates, please consult Applications Engineering at Crystal IS for specific project characteristics needs.

Inlet Water Specification

	Unit	Min	Type	Max	Note
Flow Rate	LPM	0.4		2	
UV (265 nm) Transmittance	%/cm	95	-		
Water Temperature Range (LED ON)	°C	>1	-	50	Frozen water should be avoided to ensure proper operation.
Water Temperature Range (LED OFF)	°C	>1	-	85	
pH	pH	5.8	-	8.6	



Klaran WR

Electrical Characteristics


	Unit	Min	Typ.	Max	Note
Power Input Voltage	V	11.4	12	12.6	Constant Voltage
Power Consumption	W	-	10		
Enable Input Voltage	V	5	5	6	
Alert Indicator Output Voltage	V		5		
Maximum Continuous Operation Time	Minutes	-	-	10	
Maximum Recommended Service Life	Years	-	-	7	
Maximum Recommended LED ON Time*	Minutes	-	-	18,000	36,000 L capacity at 2 LPM

* Note: UVC LEDs will still emit UVC energy beyond the Maximum Recommended LED ON time, but may not deliver sufficient UV dose meet stated disinfection performance characteristics.

Physical Characteristics

		Min	Type	Max
Weight	Grams		280	
Ambient Temperature Range	C	>1	-	50
Pressure Drop	kPa	-	-	15
Pressure Resistance	MPa	-	-	0.7

Mechanical Dimensions

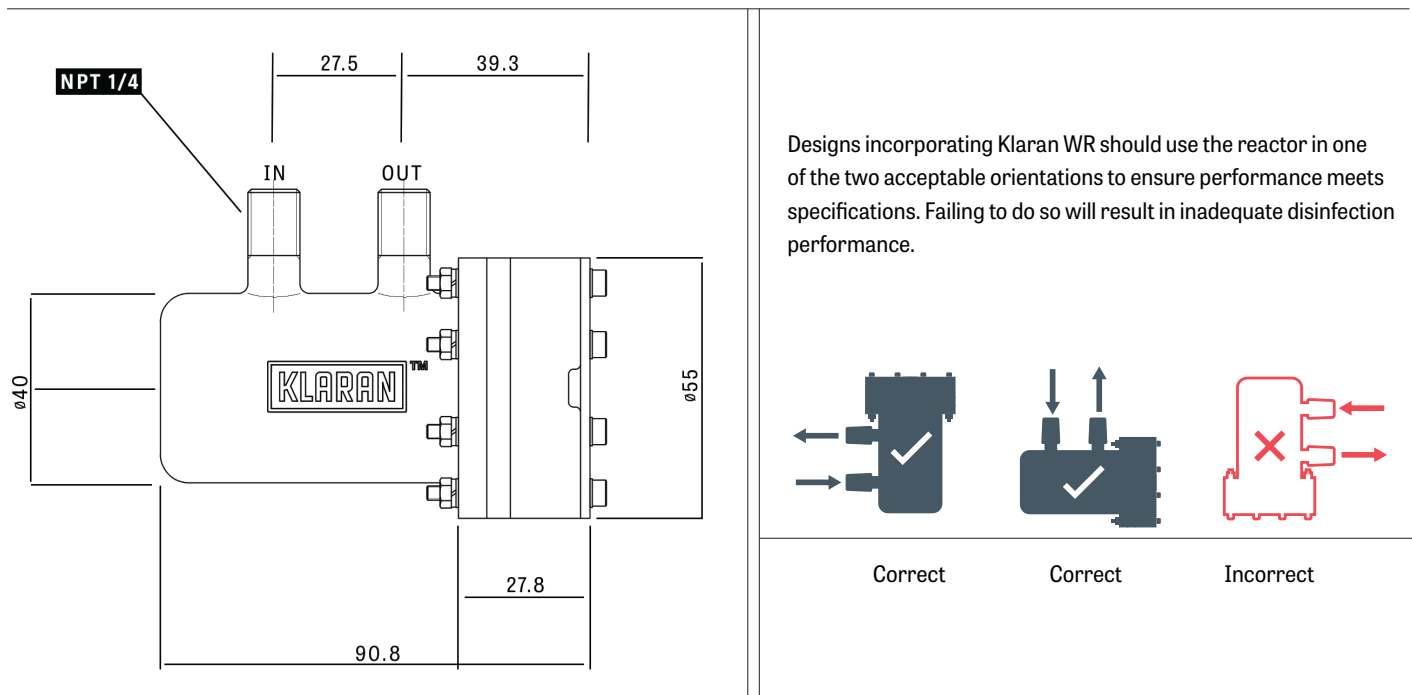


All dimensions in millimeters. Note that the Klaran WR fittings are 0.25" NPT size.

Wiring Specifications

Name	IN/OUT	Note
VCC (Red)	IN	DC12V required
GND (Black)	GROUND	GROUND for LED and Driver. It is for VCC, ENABLE and INDICATOR
ENABLE (White)	IN	5V TTL. High=Operation, Low=Standby
INDICATOR (Blue)	OUT	5V TTL. High=Normal Operation, Low=Standby or Alarm

Recommended Connector Type

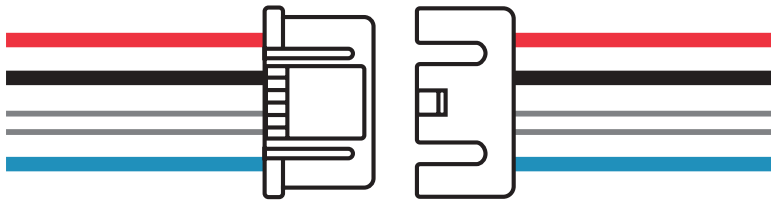

Left side: Molex Female (#0355720400)

Right side: Molex Male (#0353120460)

Handling Precautions

The Klaran WR contains microelectronic components sensitive to shock, moisture, and operation in conditions beyond stated maximums in this data sheet. Proper care should be followed during shipping, handling, installation, and operation.

Klaran WR is ESD (electrostatic discharge) sensitive—static electricity and surge voltages seriously damage internal components and can result in product failure.

- > Ensure that tools, jigs and machines being used are properly grounded.
- > Use proper ESD protection, including grounded wrist straps, ESD footwear and clothes when handling the product.

Dropping the product from heights 30 cm and greater will cause permanent damage and impact the reactor performance. Dropping the product from shorter heights may also cause damage.

Do not modify or disassemble the Klaran WR. Doing so may result in damage, hazardous operation conditions or exposure to UVC radiation.

Klaran WR should be stored in a controlled, dust-free environment at an ambient temperature less than 30 °C.



DISCLAIMER

The information in this document has been compiled from reference materials and other sources believed to be reliable, and given in good faith. No warranty, either expressed or implied, is made, however, to the accuracy and completeness of the information, nor is any responsibility assumed or implied for any loss or damage resulting from inaccuracies or omissions. Each user bears full responsibility for making their own determination as to the suitability of Crystal IS products, recommendations or advice for its own particular use. Crystal IS makes no warranty or guarantee, express or implied, as to results obtained in end-use, nor of any design incorporating its Products, recommendation or advice.

Each user must identify and perform all tests and analyses necessary to ensure that its finished application incorporating Crystal IS' products will be safe and suitable for use under end-use conditions. Each user of devices assumes full responsibility to become educated in and to protect from harmful irradiation. Crystal IS specifically disclaims any and all liability for harm arising from buyer's use or misuse of UVC devices either in development or end-use.

WE INVITE YOU TO LEARN MORE ABOUT OUR UVC LEDs.

KLARAN®

70 Cohoes Avenue, Green Island, NY 12183 U.S.A.

518.271.7375 | www.klaran.com | sales@klarant.com

© 2019 Crystal IS, Inc. All rights reserved. Crystal IS, Klaran and the Crystal IS logo are trademarks of Crystal IS, Inc. and/or its affiliates. All other trademarks are the property of their respective owners. 1045-1806